

General

Location:	Interior
Class:	cULus (Class I)
Location Rating:	Dry
Driver Required:	Mains 120V
Installation Orientation:	-
Fitting Method:	-
Main Material:	Metal - Mild Steel
Dimensions (mm):	H:1700 W: 660 Ø: 216
Dimensions (inch):	H: 66.93 W: 25.98 Ø: 8.5
Cut Out Hole (mm/inch):	-
Recess Depth (mm/inch):	-
Fire Rating:	-
Cable Length (mm/inch):	3000/118.1
Gross Weight (lb):	17.82
Ada Compliant:	Yes - if installed in compliance with ADA 308, 309.3, 309.4
Ic Rating:	-

Lamp

Light Source:	E26/Medium
Wattage:	43W
Lamp Included:	No
Maximum Lamp Length (mm/inch):	114/4.49
Luminous Flux (lm):	Lamp Dependent
Colour Temp (K):	Lamp Dependent
Cri (Ra):	Lamp Dependent
Macadam Ellipse:	Lamp Dependent
Tilt Adjustable Angle (°):	90
Rotation Adjustable Angle (°):	330
Lifetime (hrs):	Lamp Dependent
Beam Angle (°):	-

Electrical

Switched:	Yes
Dimmable:	No
Dimming Method:	-
Supply Frequency (Hz):	-
Driver/Ballast Voltage (V):	-
Driver Lifetime (hrs):	-
Efficacy (lm/W):	Lamp Dependent

Additional Information:

Shade Included:	-
Shade/Diffuser Material:	-
Shade/Diffuser Finish:	-
F Mark:	-



CODE: 1223069
FINISH: POLISHED CHROME



CODE: 1223070
FINISH: MATT BLACK




CODE: 1223071
FINISH: CREAM

To maintain this product to its best condition, please view our care and cleaning guideLINES on the support section of the Astro website.

Product Elevations

astro

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes.

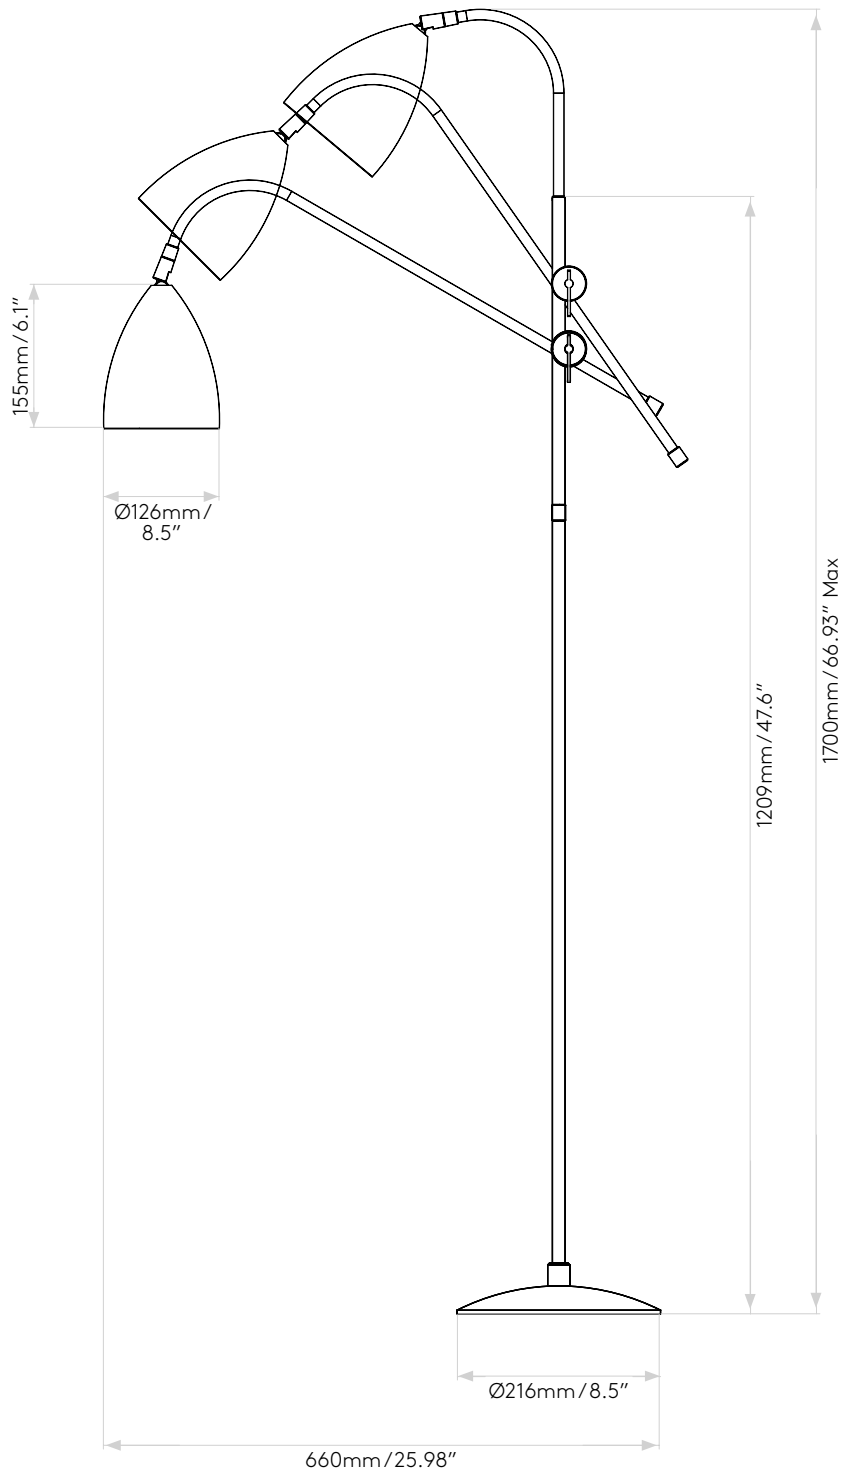

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.